

6th CIRP Global Web Conference
“Envisaging the future manufacturing, design, technologies and systems in innovation era”

Design and Ergonomic Analysis of the Waste Electrical and Electronic Equipment (WEEE) Remanufacturing Workcell Fixture Using Digital Mock-up Environment

Adelaide Marzano ^{a*}, Parag Vichare ^a, Patricia Muñoz-Escalona ^b

^a School of Computing, Engineering, and Physical Science, University of the West of Scotland, Paisley, PA1 2BE, UK

^b School of Computing, Engineering and Built Environment, Glasgow Caledonian University, Glasgow G4 0BA, UK

* Corresponding author. Tel.: +44(0)1418498292; fax: +44(0)1418483000. E-mail address: adelaide.marzano@uws.ac.uk

Abstract

Traditionally, operations in recycling industry such as WEEE (Waste Electrical and Electronic Equipment) are labour intensive and time consuming due to the nature of discrete / non-standards product states. Hence, small-mid scale WEEE recycling companies require significant product state assessment, process design and technology commitment in order to bid for mass refurbishment projects. Employing digital process simulation tools (which is prevalent in automotive and aircraft manufacturing industries) will result in design of ergonomically viable workstations. This paper introduces design and ergonomic assessment for remanufacturing workcell for light weight, hull shaped free-formed components. It demonstrates that the use of digital process simulation is a valuable tool and leads pathways towards establishing better workplaces where work related disorders are frequently reported in such industries.

© 2018 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY-NC-ND license

(<https://creativecommons.org/licenses/by-nc-nd/4.0/>)

Selection and peer-review under responsibility of the scientific committee of the 6th CIRP Global Web Conference “Envisaging the future manufacturing, design, technologies and systems in innovation era”.

Keywords: Ergonomics; Digital Mock-up; Design

1. Introduction

Traditionally, operations in recycling industry are labour intensive and time consuming due to the nature of discrete product states. Existing methods of refurbishment involve dismantling, cleaning, inspection, repair work if required, replacement if necessary, painting and re-installation. Currently these processes are discrete in nature and require labour intensive resources. However, for mass refurbishment projects,

it is possible to introduce dedicated workstations that can reduce process time. The contribution in this paper is a design and analysis of dedicated remanufacturing workstation for restoring and extending the functionality of existing aluminum casting lamp with the view to responding similar mass refurbishment projects. As a part of this work, employing digital process simulation tools (which is prevalent in automotive and aircraft manufacturing industries) will result in design of ergonomically viable workstation, which will be a

novel approach for recycling industries to evaluate work fatigue in labour intensive operations. The case study of digital process simulation presented in this paper will be a valuable demonstrator and it can lead pathways towards establishing better workplaces where work related upper limb disorders are frequently reported in such industries. If recycling industries are aiming to be remanufacturing industries in the circular economy, it is important that advances and benefits in aerospace and automotive industries should be adapted and transferred.

An industrial case study has been presented, where case scenario is selected from a recycling company. The company has established business in recycling WEEE products, which involves collection, disassembly and disposal. This company is aiming to re-use existing WEEE products as a part of their new business stream, thus remanufacturing knowledge transfer is required to support this business. The work presented in this paper reports post-evaluation phase of this business case; a design phase to build dedicated workstation for remanufacturing intended WEEE product. Following section 2 reviews core principles of remanufacturing methodologies for WEEE industries. Digital Mock-up tools are utilized in the design phase, thus reviewing workstation design principles. Section 3 presents a case study and workstation design constraints. Traditional practice of recycling the same product has been discussed with scope of improvement. Section 4 employs digital mock-up tools to evaluate designed workstation for ergonomics requirements fulfillments. This is followed by conclusion and future work in section 5.

2. WEEE service sector, Remanufacturing strategies and Digital Mock-up tools

Today WEEE industry is evidencing accelerated attention from academics, government policy makers, world forums, entrepreneurs as well as consumer social behavior. This has resulted in new laws and regulations [1], business models [2], product [3], manufacturing strategies [4] and supply chain logistics [5].

Despite all benefits the manufacturing industry brings to the society it is well know the risks to the environment especially during the production phase and end-of life of the products, where Design for Environment (DFE) and Design for Assembly (DFA) plays important roles [6]. Previous research carried out by [7] has shown how reuse extends product's lifetime as well as offsets the embodied energy that is created during the manufacturing process; reuse have also been identified as the most appropriate end-of-life cycle for electronic components. Design for end of life need to be considered with remarkable attention towards disassembly aspects. Authors in previous research, [8] have shown how disassembly based strategies can provide environmental contributions where disassembly parameters must be considered in the disassembly process and will differ depending on the type of industry. Few examples of these parameters are: accessibility, tools type, connection type, connection quantity, etc.

A model for decision-makers and designers for re-engineering purposes has been developed and can be used to

evaluate disassemblability indices and enhance products end-of-life. Remanufacturing involves extending use of existing products beyond its normal expected life by re-using whole or part of the product. New remanufactured product may have same or different purpose, depending upon its functionality and intended use. This trend is estimated to save 85% of energy that required to manufacture the initial product [9]. Thus, remanufacturing can be regarded as an identification of existing products in order to re-use it for developing a new product that can fulfill market demand. Although some literature and case studies by [10] are now available on identifying such existing products for remanufacture, there remains a shortfall from eminent product design industries to adopt this business model in designing their products for future remanufacture purpose. While it is challenging to envisage future remanufacture products from current new product lines due to unforeseen change in the technology landscape, it is possible to identify existing near warranty products in use phase for remanufacturing assessment.

Remanufacturing process involves disassembly, cleaning, inspection, sorting, reconditioning, reassembly, testing and dispatch stages, [11]. While addressing Design-For-Remanufacture (DFRef) guidelines, [12] have highlighted that environmental assessment should be a part of remanufacturing decision making in order to evaluate or propose a business case. These guidelines forms the basis for defining a remanufacturing process flow for the case study reported in this paper.

Designing for Assembly (DFA) means that the design of components must fulfill specific requirements for assembly in order to ensure an optimal and efficient process. DFA focuses on reducing products assembly costs by reducing assembly operation, materials, standardize parts, reduction of fasteners, design for symmetry for insertion, etc. The cost of assembling a product is proportional to number of parts. In order to simplify a design process, design for manufacturing and assembly (DFMA) needs to be applied as it saves cost, time and improves quality and environment.

In [13], the advantages that come from the simulation, in a virtual environment of a Manual Handling activity have been presented. Other works [14] and [15], have shown the behaviours and the characteristics of digital human models and the advantages offered by the use of ergonomic software in engineering design. Digital Mock-up is a design approach based on the use of simulation modelling tools. It allows to simulate work environments, operators, and machines and to reproduce, in virtual environments, all the assembly activities such as access, handling, disassembly, repair and assembly tasks, [16]. In fact, Digital Human Models, by simulating behaviours and characteristics of real persons, allow performing accessibility and manipulability analysis in a rigorous and quick way.

Virtual simulation of maintainability tasks, by means of Digital Human Models, allows to:

- Evaluate visibility, reachability and grasping of component parts during assembly and disassembly phases;
- Verify the possibility for the operators of using the necessary tools.

Table 1. Disassembly process sequence.

Activity sequence	Activity description	Part Inventory	Old setup (min)	New setup (min)	Component Reuse
1	Place housing on the fixture pads			0.5	
2	Remove front Locking clip				
2.1	Open locking clip	-	0.5	0.5	Yes
	Remove Locking clip	2	0.5	0.5	Yes
3	Clamp housing in open position				
3.1	Open housing	-	0.25	0.25	-
3.2	Lock with Toggle clamps	-	-	0.25	-
3.3	Latch upper half with holding clip	-	0.5	0.25	-
4	Remove electric circuit board and wires, clips and seal				
4.1	Remove wire plug on lamp unit	-	0.25	0.25	-
4.2	Remove Screws with PT		6	1.5	Yes
4.3	Remove post lock screw	2	0.5	0.25	Yes
4.4	Cut ceramic plug wires	-	0.5	0.5	-
4.5	Remove circuit board	1	1	0.5	No
4.6	Remove UH seal	1	0.5	0.5	Yes
5	Disassemble lamp housing				
5.1	Remove lamp housing	1	0.5	0.5	Yes
5.2	Remove lamp housing seal	1	0.5	0.5	Yes
5.3	Disassemble lamp holding unit	1	0.5	0.5	Yes
6	Disassemble upper housing				
6.1	Remove UH holding bracket screw	2	1	0.5	Yes
6.2	Remove UH holding bracket link and close housing	1	0.5	0.5	Yes
6.3	Remove pivot pins	2	4	3	Yes
6.4	Remove upper housing	1	0.5	0.5	Yes
6.5	Remove pole post screw	3	1	0.5	Yes
7	Remove ceramic plug	1	10	4	No
8	Unclamp Lower housing	1	-	0.25	Yes
TOTAL		37	29	16.5	

It is essential, in a virtual environment, to simulate all these operations in order to verify in the first place their feasibility. In fact, for instance, it cannot be taken for granted that all the points can be reached starting from different postures. The execution of this analysis guarantees the feasibility of the assignment. Among the phases of optimization this is the one that requires the longest time. Since it needs the creation of a large number of simulations in real time, without taking into account that some of them will turn out to be useless, because,

for instance, the simulation shows that some points cannot be reached with the movements that the designer had conceived. Other parameters that can be modified are the distances of the manikin from objects taken as a reference, and the possibility to move the objects in the working area.

In order to evaluate the ergonomics of the workcell, the design process was carried out in accordance with the macro processes described in Table 1. By utilising this workcell design the critical postures of the operator were identified. The critical postures were decided by the frequency that the operator would use a certain posture and the importance to the task. Once the initial postures were defined, the sequence of operation was simulated. This aided with producing realistic times for the operator to walk around the disassembly area.

By simulating the operations in a virtual environment, the workers' postures were evaluated using the Posture Evaluation Index (PEI), developed and illustrated in [13]. The PEI integrates the results of the Low Back Compression Analysis (LBA), [18], the Ovako Working Posture Analysis (OWAS), [19], and the Rapid Upper Limb Assessment Analysis (RULA), [20], in a synthetic non-dimensional index able to evaluate the "quality" of a posture:

$$PEI = \frac{LBA}{3400} + \frac{OWAS}{3} + \frac{RULA}{5} \quad (1)$$

Ten critical postures, which the operator would assume while performing the repair procedures, were identified. Fig.2 shows the final configuration of the workcell.

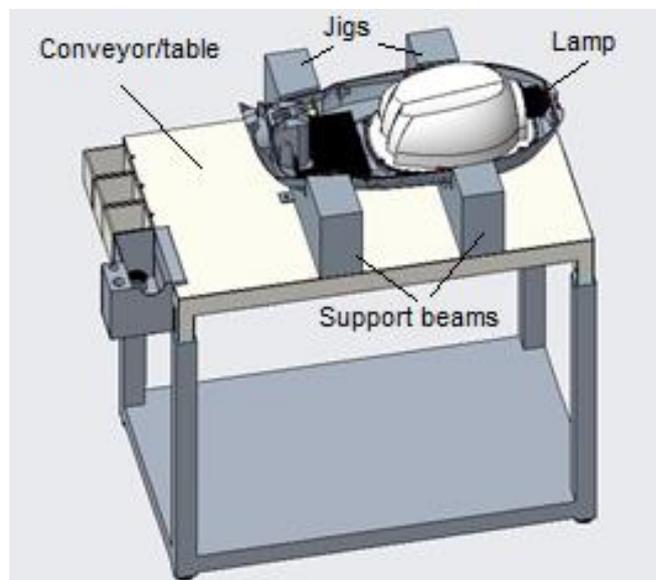


Fig. 2. Workcell configuration.

Moreover, the tasks (a) Positioning lamp on the jig; (b) Lifting lamp out of Support Beams; (c) Balancing product for placing into support; (d) lifting lamp from conveyor and corresponding postures are shown in Fig.3. These tasks need the use of both hands; as the element does not contain handles, the only way to lift the object is to grasp it at the top border. After the results for the PEI were calculated for the ten critical configurations, the PEI of each configuration was analysed

against the benchmark, $PEI < 3$, [13]. Table 2 synthesizes the results of the ergonomics analysis where: $I_1 = LBA/3400\text{ N}$, $I_2 = OWAS/3$, $I_3 = RULA/5$.



Fig. 3. (a) Positioning lamp on the jig; (b) Lifting lamp out of Support Beams; (c) Balancing product for placing into support; (d) lifting lamp from conveyor.

Table 2. Ergonomics analysis results.

	Posture									
	1	2	3	4	5	6	7	8	9	10
I_1	0.159	0.564	0.501	0.140	0.142	0.395	0.339	0.306	0.155	0.464
I_2	0.333	0.666	0.666	0.333	0.333	0.666	0.666	0.666	0.333	0.666
I_3	0.4	0.4	0.6	0.6	0.6	0.6	0.8	0.8	0.8	0.6
PEI	0.892	1.63	1.767	1.073	1.075	1.661	1.861	1.772	1.288	1.664

5. Conclusion and future work

The proposed methodology makes available a valid tool for workplace analysis. The following objectives have been achieved: design and ergonomically assess remanufacturing workcell for light weight, hull shaped free-formed components, appraise the quality of the postures assumed during disassembly activity. Designing a new layout, to establish if it ensures the feasibility of the operation (based on the criteria of accessibility of the critical points, of compatibility of the efforts, and danger for the lower back), compare the possible alternatives for the configuration of the layout. The methodology represents an innovative approach to design for maintainability based on the integration between 3D parametric CAD systems, DMU tools, ergonomic tools and digital human models. Future research will explore methods to improve the user interface with features to determine feasible disassembly routes of a product automatically. This will relieve the effort of the product designer largely.

Acknowledgements

Authors would like to acknowledge the support provided by Scottish Institute of Remanufacture (SIR) and Wee Scotland Ltd to carry out this research at the University of the West of Scotland, UK and Naomi Sturdy and Andrew Hendry for their technical support.

References

- [1] Zhu X, Wang J, Tang J. Recycling pricing and coordination of WEEE dual-channel closed-loop supply chain considering consumers' bargaining. *Int J Environ Res Public Health* 2017;14. doi:10.3390/ijerph14121578.
- [2] Wang L, Wang XV, Gao L, Vánca J. A cloud-based approach for WEEE remanufacturing. *CIRP Ann - Manuf Technol* 2014;63:409–12. doi:10.1016/j.cirp.2014.03.114.
- [3] Ardi R. Waste Electrical and Electronic Equipment (Weee) Management Systems in the Developed and the Developing Countries: a Comparative Structural Structural Study 2016:205. doi:weee.
- [4] Cheung WM, Leong JT, Vichare P. Incorporating lean thinking and life cycle assessment to reduce environmental impacts of plastic injection moulded products. *J Clean Prod* 2018;167:759–75. doi:10.1016/j.jclepro.2017.08.208.
- [5] Quariguasi J, Neto F, Walther G, Bloemhof J, Van Nunen JAEE, Spengler T. From closed-loop to sustainable supply chains: The WEEE case *Journal: International Journal of Production Research* From closed-loop to sustainable supply chains: The WEEE case. 2009.
- [6] Ariffin R, Ghazilla R, Sakundarini N, Taha Z, Hanim S, Rashid A-, et al. Design for environment and design for disassembly practices in Malaysia: a practitioner's perspectives 2015. doi:10.1016/j.jclepro.2015.06.033.
- [7] Coughlan D, Fitzpatrick C, McMahon M. Repurposing end of life notebook computers from consumer WEEE as thin client computers e A hybrid end of life strategy for the Circular Economy in electronics 2018. doi:10.1016/j.jclepro.2018.05.029.
- [8] Sabaghi M, Mascle C, Baptiste P. Evaluation of products at design phase for an efficient disassembly at end-of-life Disassembly model Design for end-of-life Aircraft Decision-making TOPSIS Design of experiment 2016. doi:10.1016/j.jclepro.2016.01.007.
- [9] Gray C, Charter M. Remanufacturing and Product Design Designing for the 7th Generation. n.d.
- [10] Lindahl M, Sundin E, Sakao T. Environmental and economic benefits of Integrated Product Service Offerings quantified with real business cases. *J Clean Prod* 2014;64:288–96. doi:10.1016/j.jclepro.2013.07.047.
- [11] Priyono A, Ijomah WL, Bititci US. Strategic operations framework for disassembly in remanufacturing 2015. doi:10.1186/s13243-015-0018-3.
- [12] Ijomah WL. Addressing decision making for remanufacturing operations and design-for-remanufacture. *Int J Sustain Eng* 2009;2:91–102. doi:10.1080/19397030902953080.
- [13] Caputo F, Gironimo G Di, Marzano A. Ergonomic optimization of a manufacturing system work cell in a virtual environment. *Acta Polytech* 2006;vol.46:21–7.
- [14] Di Gironimo G, Marzano A. Design of an innovative assembly process of a modular train in virtual environment. *Int J Interact Des Manuf* 2007;1:85–97. doi:10.1007/s12008-007-0012-6.
- [15] Di Gironimo G, Di Martino C, Lanzotti A, Marzano A, Russo G. Improving MTM-UAS to predetermine automotive maintenance times. *Int J Interact Des Manuf* 2012;6:265–73. doi:10.1007/s12008-012-0158-8.

- [16] Wang L, Yang X. Assembly operator training and process planning via virtual systems. *Int J Sustain Eng* 2011;4:57–67. doi:10.1080/19397038.2010.542835.
- [17] Chinombo M, Vichare P, Cheung WM. Comparison of environmental life cycle analysis of aluminium alloy (LM 6) street light housing and aluminium alloy (AL Si12Cu1 {Fe}) housing 2018.
- [18] Dempsey PG. Usability of the revised NIOSH lifting equation. *Ergonomics* 2002;45:817–28. doi:10.1080/00140130210159977.
- [19] Ulin SS, Keyserling WM. Case studies of ergonomic interventions in automotive parts distribution operations. *J Occup Rehabil* 2004;14:307–26.
- [20] McAtamney L, Nigel Corlett E. RULA: a survey method for the investigation of work-related upper limb disorders. *Appl Ergon* 1993;24:91–9.